




6Q7, 6Q7-G, 6Q7-GT



DUPLEX-DIODE HIGH-MU TRIODE

Heater	Coated Unipotential Cathode		
Voltage	6.3	a-c or d-c volts	
Current	0.3	amp.	
	6Q7	6Q7-G	6Q7-GT
Direct Interelectrode Cap.	▲	▲▲	▲▲
Grid to Plate	1.4	1.5	1.6 μf
Grid to Cathode	5.0	3.2	2.2 μf
Plate to Cathode	3.8	5.0	5.0 μf
Overall Length	{ 3-1/8" max.	{ 4-7/32" to 4-15/32"	3-5/16" max.
Seated Height	{ 2-9/16" max.	{ 3-21/32" to 3-29/32"	2-3/4" max.
Maximum Diameter	1-5/16"	1-9/16"	1-5/16"
Bulb	Metal Shell, MT-8	ST-12	T-9
Cap	Miniature	{ Skirted Miniature	{ Skirted Min. Style C
Base	{ Small Wafer Octal 7-Pin	{ Small Shell Octal 7-Pin	{ Sm. Wafer Octal 7-Pin, Sleeve
Basing Designation	7V	G-7V	GT-7V
Pin 1 { 6Q7, Shell 6Q7-G, No Con. 6Q7-GT, Base Sleeve			
Pin 2 - Heater			
Pin 3 - Triode Plate			
Pin 4 - Diode Plate #2			
Pin 5 - Diode Plate #1			
Pin 7 - Heater			
Pin 8 - Cathode			
Cap - Triode Grid			
Mounting Position	Any		
BOTTOM VIEW TRIODE UNIT			
Plate Voltage	300 max. volts		
Characteristics - Class A₁ Amplifier:			
Plate	100	250	volts
Grid	-1	-3	volts
Amp. Fact.	70	70	
Plate Res.	58000	58000	ohms
Transcond.	1200	1200	μmhos
Plate Cur.	0.8	1.0	ma.
Typical Operation - Resistance-Coupled Amplifier:			
See RESISTANCE-COUPLED AMPLIFIER CHART			
DIODE UNITS - Two			
Consideration of these units is given under Type 85. Circuits will be similar to those shown for Type 55 with fixed bias. Diode biasing of the triode unit of the 6Q7, 6Q7-G or 6Q7-GT is not suitable. Diode curves under Type 6B7 apply to the 6Q7, 6Q7-G, and 6Q7-GT.			
■ In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.			
▲ With shell connected to cathode. Values are approximate.			
▲▲ With close-fitting shield connected to cathode. Values are approximate.			

← Indicates a change.

Dec. 1, 1941


RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

DATA

6Q7



AVERAGE CHARACTERISTICS

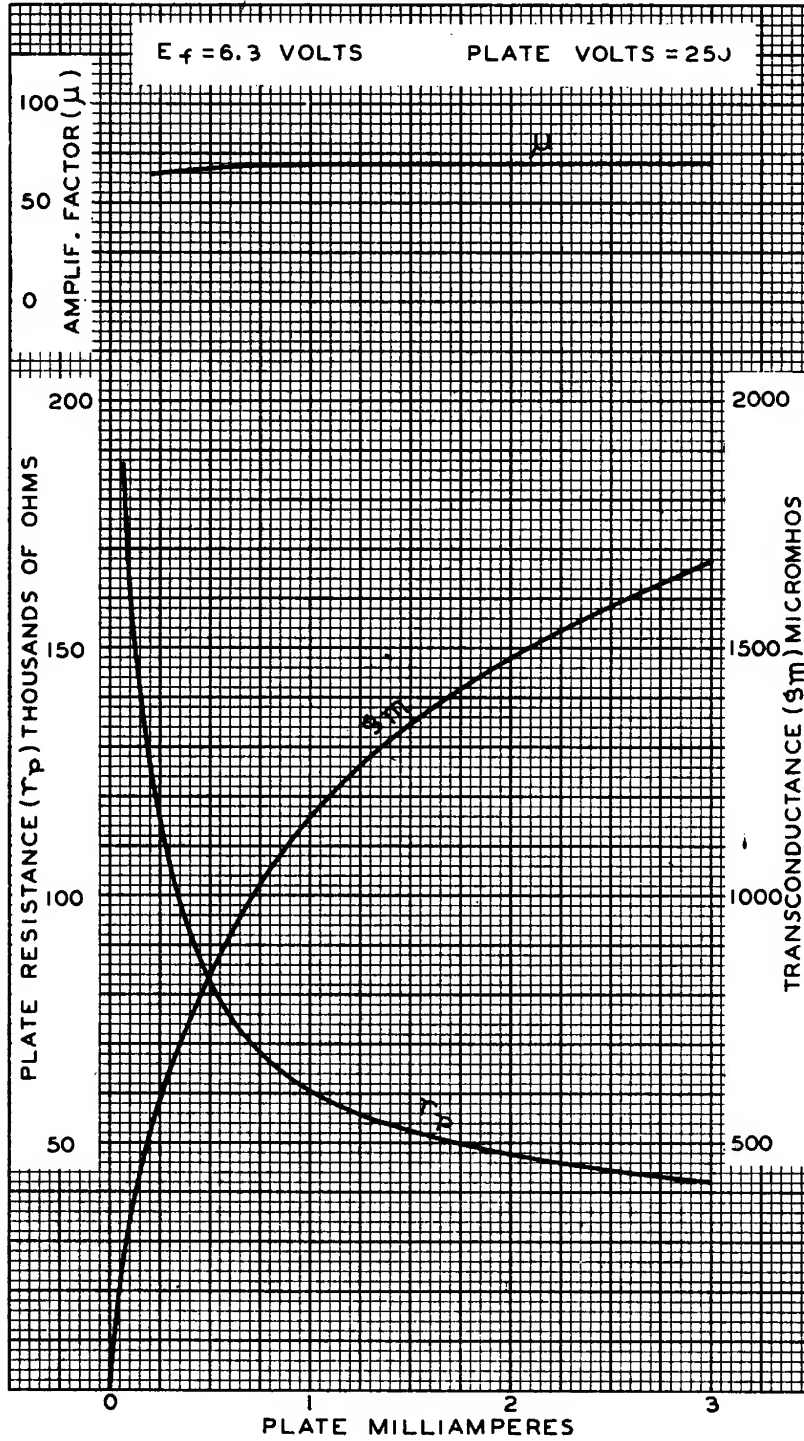

JUNE 29, 1936


RCA RADION TRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4577



6Q7

AVERAGE PLATE CHARACTERISTICS TRIODE UNIT

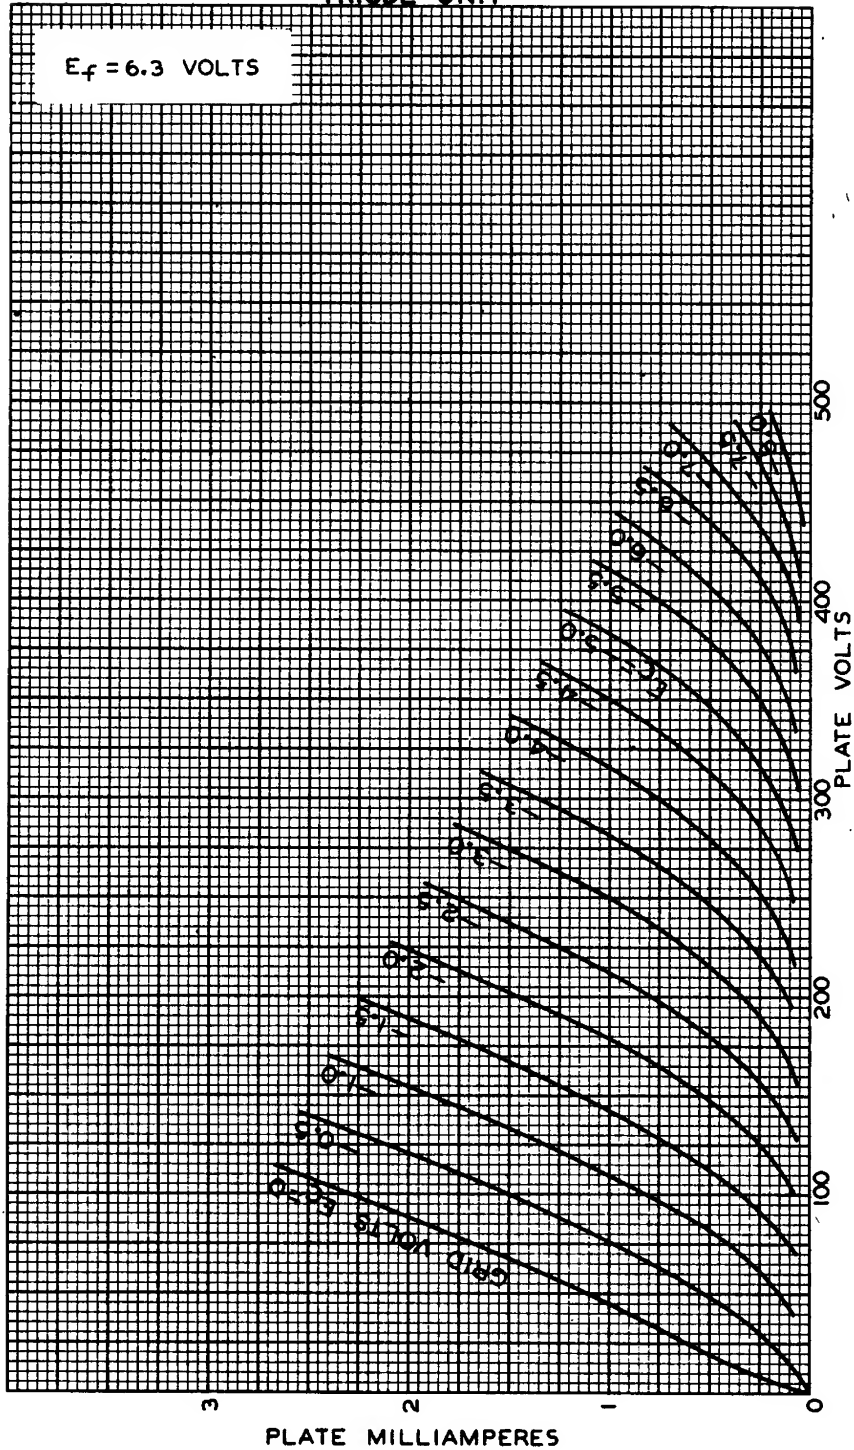

SEPT. 10, 1941

RCA RADION TRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4522R2